

GEOCEAN

REFERENCES



KITA & NYANGASSA REPAIRS - 2004

Repair of pipelines and risers for TOTAL E&P Cameroun



THE PROJECT

Total E&P Cameroun had several damaged lines on the production field Rio Del Rey in Cameroon. Geocan have been awarded the contract for the repair of the 8" sealine of Kita platform the 6th January 2004. A second contract for the repair for a 4" gas lift line has been awarded to Geocan during the work. The offshore works have been carried out successfully from 20th February to 23th March 2004.


8" OIL PIPELINE between KITA and EKF1



Diving survey, deburial of the damaged pipes, recovery of risers and a part of pipeline, fabrication of a new risers and installation of flexible pipes between the risers and the pipeline, installation of two systems to record the pipe movement, precommissioning.

The Kita site is a strong current and shallow water area (4.5m LAT at the platform).

4" GAS LIFT PIPELINE between NYANGASSA NORD and ITINDI

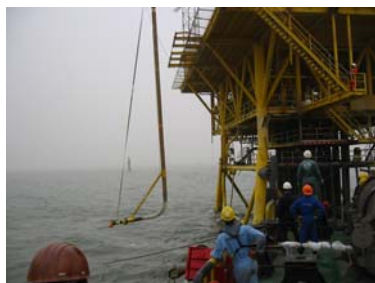

Diving survey, deburial and removal of damaged pipe and riser. Reconstruction of pipe and riser by side lifting. Precommissioning.

MARINE SPREAD

Work and Accommodation Barge 77m x 26m
Anchor Handling Tug, 3000 CV, low draft

